

FACTORIES  
LIVESTOCK

GREENHOUSES

BUILDINGS

WAREHOUSES

RESTAURANTS

官方網站



FaceBook



# PRODUCT CATALOG



翊豐通風



Business and service customers all over the world

全國最大通風降溫設備製造商

南投、桃園、高雄在地經營設廠為您服務



南投總公司



Nantou

桃園營業所



Taoyuan

高雄營業所



Kaohsiung

TAIWAN



# 翊豐通風


EASY FONG ENTERPRISE CO., LTD.



**MADE IN TAIWAN**

DC energy saving  
High efficiency motor

International Protection  
Marking IP66



R-type pin is utilized in the shaft edge  
to prevent the blades from falling off



Comes with "DC motor speed regulator"  
Function: 0~100 stepless speed regulation



Brushless DC  
variable frequency motor

## Animal husbandry applications Ventilation and cooling equipment


Special for livestock  
Simple fan/Ventilation fan



Vortex circulation fan



Special for livestock  
Negative pressure fan

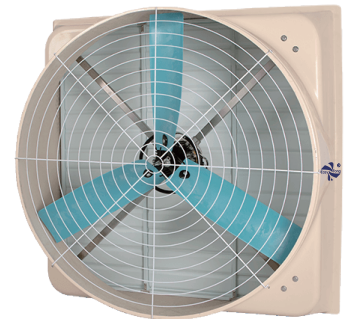

### Specifications

54 inch DC Inverter  
Simple fan

1.3m DC Inverter  
Ventilation Fan

40 inch DC Inverter  
Circulation Fan

54 inch DC Inverter  
Negative Exhaust Fan

Product model	D54F1P3E	D1330E	D40P6E	D54P3K
Rated voltage	Single-phase/220V/60Hz/7.4A	Single-phase/220V/60Hz/7.4A	Single-phase/220V/60Hz/7.4A	Single-phase/220V/60Hz/7.4A
Motor parameters	1.5HP/16P/F class/IP66	1.5HP/16P/F class/IP66	1.5HP/16P/F class/IP66	1.5HP/16P/F class/IP66
Power consumption	900W	900W	910W	850W
Fan speed regulation	Stepless speed regulation	Stepless speed regulation	Stepless speed regulation	Stepless speed regulation
Maximum speed	500RPM	500RPM	660RPM	500RPM
Air supply distance	25-30M	25-30M	40-50M	40000m3/H
Noise value	≤ 78dB	≤ 74dB	≤ 78dB	≤ 82dB
Product Size	136cm x 136cm x 43cm	147cm x 147cm x 48cm	101cm x 101cm x 45cm	146cm x 146cm x 58cm
product weight	33kg	31kg	33kg	37kg
Suggested price	Please refer to the official website	Please refer to the official website	Please refer to the official website	Please refer to the official website

Patented 304 stainless steel combination tripod / Rust-proof, Acid-alkali resistant  
FRP fiberglass composite shell, able to adapt to various environments  
Energy-saving inverter motor / Low consumption, extremely power saving



# Animal husbandry applications Ventilation and cooling equipment

A good livestock ventilation system can save feed and provide a good  
Easy Fong creates a good ventilation and cooling system for your livestock farm.




**Pig house, laying hen farm, pheasant farm, dairy farm, sheep farm, duck house...etc.**

## Slatted floor for pig farm

Applicable: Sow farrowing bed /Fattening bed

**SUPER LOAD-BEARING CAPACITY!  
CORROSION RESISTANT!**

Product Name	Pigsty Flooring (Flat Panel)
Material	PP+30% Glass Fiber
Product Dimensions	Length 120 × Width 60 cm (Thickness 6 cm)
Aperture	Length 7.5 × Width 1.2 cm
Weight	13.4 kg
Load-Bearing Strength	500 kg
Color	Black
Suggested Price	Please refer to the official website

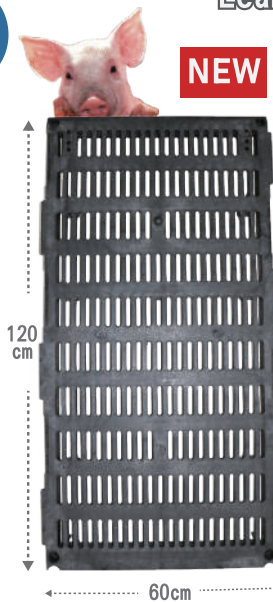

## Leakage board sewage treatment and breeding



- ◆ Resist penetration and reduce the growth of pathogenic bacteria
- ◆ Save manpower and reduce the burden of sewage treatment
- ◆ Pressed edge design at the splicing area for more stable installation
- ◆ Patented structural design, high load-bearing capacity
- ◆ Easy installation and construction, saving time and effort
- ◆ Standard aperture, no feces accumulation, easy to clean

## Slatted floor for poultry house

Quality Assurance  
Wholesale supply

## Special for laying hen farm Circulating Fan



Aluminum alloy blade

### Specifications 16-inch Four-Blade AC Circulating Fan

Product model	A16P4
Rated voltage	Single Phase / 220V / 60Hz / 1.1A
Motor parameters	0.2HP / 4P / Class B
Power consumption	220W
Fan speed regulation	Non-adjustable
Maximum speed	1600RPM
Airflow Distance	10-15M
Noise value	≤72dB (measured 3 meters from the fan)
Product Size	40 x 40 x 30cm
product weight	8 kg
Suggested price	Please refer to the official website

It is suitable for use in various places where it is necessary to improve the quality of the breeding environment, reduce the cleaning work and save water consumption.



Using the principle of air convection, the hot air in the greenhouse is forced out of the room, and fresh outdoor air is drawn in to achieve ventilation and cooling effects in the greenhouse.

**Enhance air convection  
Cool natural circulation**

## Agricultural Greenhouse Ventilation and Cooling equipment

Specifically designed for greenhouse, agricultural, and livestock

Patented 304 stainless steel combination tripod is not easy to rust, PP shell can adapt to various environments, Easy maintenance, sturdy and durable, large air volume, long air supply distance

**Internal circulation fan  
Best for greenhouses**



## Vortex Booster fan Circulation fan

Low noise

Large air volume

Easy maintenance

High efficiency

Rustproofing

Vortex

**Specifications**

18-inch industrial booster fan

22-inch industrial booster fan

Product model	A18P3	A22P3
Rated voltage	Single Phase/220V/60Hz/1.19A	Single Phase/220V/60Hz/1.93A
Motor parameters	0.25HP/4P/Class B	0.34HP/4P/Class B
Power consumption	260W	430W
Fan speed regulation	Non-adjustable speed	Non-adjustable speed
Maximum speed	1450RPM	1350RPM
Air supply distance	15-20M	25-30M
Noise value	≤60dB	≤65dB
Product Size	48 × 48 × 30cm	57 × 57 × 35cm
product weight	7.5Kg	12Kg
Suggested price	Please refer to the official website	Please refer to the official website

**Specifications**

24-inch three-leaf AC circulation fan/220V

24-inch three-leaf AC circulation fan/110V

Product model	A24P3	A24P3E
Rated voltage	Single Phase/220V/60Hz/1.8A	Single Phase/110V/60Hz/3.15A
Motor parameters	0.26HP/6P/Class B	0.26HP/6P/Class B
Power consumption	396W	346W
Fan speed regulation	Non-adjustable speed	Three-Speed
Maximum speed	1000RPM	1000RPM
Air supply distance	20-30M	20-30M
Noise value	≤65dB	≤65dB
Product Size	74 × 74 × 31.5cm	74 × 74 × 31.5cm
product weight	15Kg	15Kg
Suggested price	Please refer to the official website	Please refer to the official website

# Solar exhaust fan series



翊豐通風  
EASY FONG ENTERPRISE CO., LTD.

## Solar Exhaust Fan

is a roof cooling and ventilation equipment designed, developed and produced by the Easy Fong team. It combines solar panels and ventilation fans. The effect is several times greater than that of natural ventilators and enhances air circulation.



- FACTORIES
- LIVESTOCK
- GREENHOUSES
- BUILDINGS
- WAREHOUSES
- RESTAURANTS

## Green energy technology

Sustainability and environmental protection love the earth



ESUN60

ESUN40

### Specifications

26 inch Solar Exhaust Fan    16 inch Solar Exhaust Fan


Product model	ESUN60	ESUN40
Rated voltage	Solar Panel/DC18V/60W	Solar Panel/DC18V/40W
Motor parameters	DC20V/0.04HP/8P/Class E	DC20V/0.04HP/8P/Class E
Power consumption	30W/1.58A	30W/1.58A
Fan speed regulation	Optional (Remote Speed Control Module)	Adjustable (with Remote Speed Control Module)
Maximum speed	1,500RPM	1,500RPM
Maximum Air Volume	4,000 m3/H	3,000 m3/H
Noise value	≤72dB	≤72dB
Product Size	L92×W85×H72cm	L65×W65×H35 cm
product weight	33 kg	15 kg
Suggested price	Please refer to the official website	Please refer to the official website

This product has been inspected by SGS and its static simulated typhoon pressure coefficient can reach level 17 for severe typhoons.



Won the 15th  
National Brand Yushan Award  
[ Best Product Award ]

### Rooftop extractor fan concept / 屋頂抽風扇概念 :

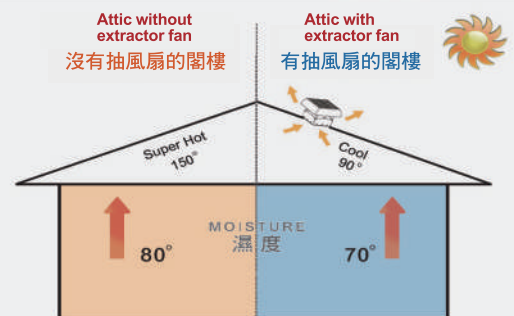

Automatically disconnect the solar power supply when the mains is input



# Portable Cart Fan Series



翼豐通風  
EASY FONG ENTERPRISE CO., LTD.

Applicable places: motorcycle shops, car beauty, maintenance shops, CNC factories, public works units, restaurants, snack bars...etc.



**D30TER**

30 inch DC Motor  
Tool Cart Fan



**A30TER**

30 inch AC Motor  
Tool Cart Fan



**A24TER**

24 inch AC Motor  
Tool Cart Fan

## Specifications

Product model	Rated voltage	Motor parameters	Power consumption	Fan speed regulation	Maximum speed	Air supply distance	Noise value	Product Size	Mproduct weight
D30TER	110V/60Hz	0.67HP/10P/Class F	510W/5.0A	7 speed	1160RPM	15~25M	≅65dB	85×42×92cm	31kg
A30TER	110V/60Hz	0.7HP/6P/Class B	530W/5.0A	3 speed	1000RPM	15~25M	≅65dB	85×42×92cm	35kg
A24TER	110V/60Hz	0.47HP/6P/Class F	332W/3.0A	3 speed	1000RPM	15~20M	≅69dB	77×40×82cm	26kg


It supplies air in a large range, accelerates air circulation, and exhausts heat effectively.



**A24P3ER**  
24 inch mobile Fan



**D40P6ER**  
40 inch  
DC mobile Fan

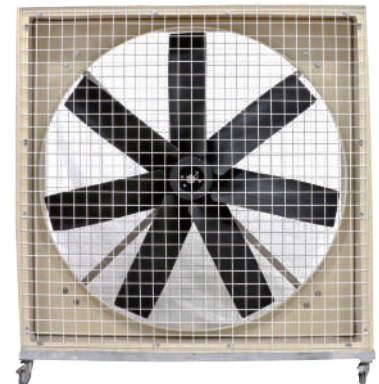

**D54FP6ER**  
54 inch  
DC mobile Fan



## Specifications

Product model	Rated voltage	Motor parameters	Power consumption	Fan speed regulation	Maximum speed	Air supply distance	Noise value	Product Size	product weight
A24P3ER	110V/60Hz	0.26HP/6P/Class B	346W/3.15A	3speed	1000RPM	20~30M	≅65dB	80×37×91cm	22kg
D40P6ER	220V/60Hz	1.5HP/16P/Class F	910W/7.4A	Stepless speed regulation	660RPM	40~50M	≅78dB	108×57×122cm	42kg
D54FP6ER	220V/60Hz	1.5HP/16P/Class F	900W/7.4A	Stepless speed regulation	530RPM	25~30M	≅72dB	137×45×149cm	58kg

# Industrial Portable Fan